


**Features:**

- Used to control the Direct Current load, like DC LED lights for door of wardrobe in bedroom, hotel, etc.
- Flame-resistant PBT cases and high temperature resistant UL1430 wires.
- Standard 18" #20AWG Leads, Special leads upon request.
- Adjustable installation position.
- 15mm operation gap.
- Large load capacity with MOSFET.



**Specifications :**

Operation gap	15mm Min.
Circuit type	Normal open when closed: PS-070-DC-1 Normal closed when closed: PS-070-DC-4
Contact Rating	50W Max. (Continuous switching frequency $\leq 0.1\text{Hz}$ )
Operating Voltage	3~28VDC
Operating Current	2.2A Max. (The wires should not be overheated)
Insulating Voltage	1500VDC (Between case and wire)
Switching cycles	1 million times
Operating Temperature	-15~+65°C


**SURFACE MOUNT**

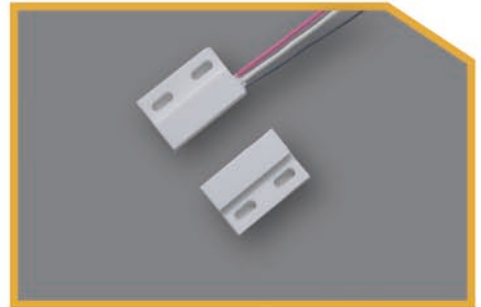


**Dimensions(mm):**

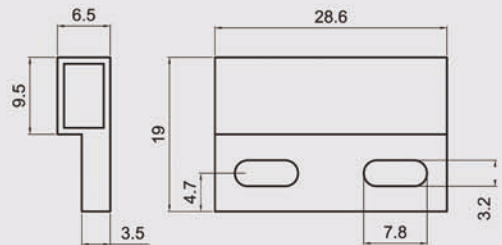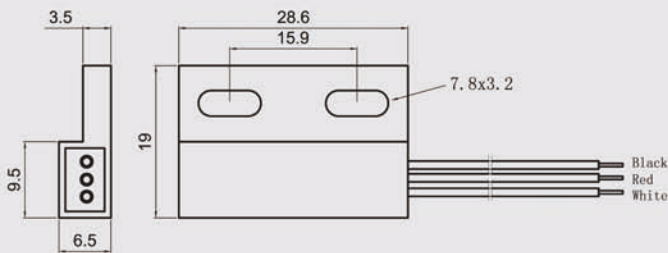

**Wiring and Operation:**

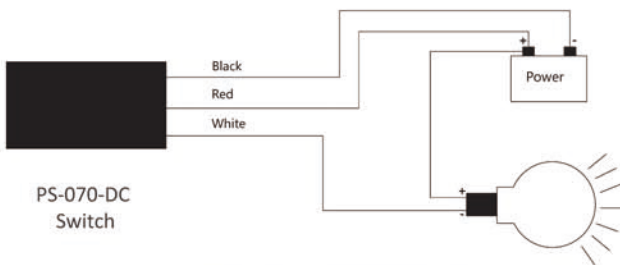

Note: Wiring circuit diagram as shown above

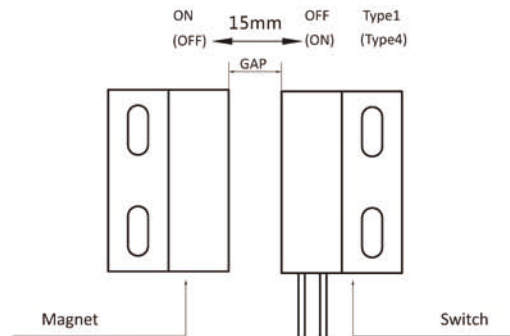

Note: The operation gap will be slightly deviated and affected by other environmental factors. Recommended installation distance is within 1/2 of the operation gap.